

# PROTOTYPE OF THE DLR OPERATIONAL COMPOSITE CLOCK: METHODS AND TEST CASES

Matthias Suess and Jens Hammesfahr

Matthias.suess@dlr.de  
German Aerospace Centre (DLR)  
Oberpfaffenhofen, Germany

## *Abstract*

*The operational implementation of the ensemble Kalman filter Composite Clock (CC developed by K. R. Brown), is subject of the paper. Although the mathematical background of the CC is well-known, its autonomous and robust operation in a clock laboratory requires further modifications of the CC. The suitable initialization of the first ensemble estimate is discussed. Due to the fact, that only difference measurements are available, there is a dimensional degree of freedom in the first as in the following ensemble estimates. Furthermore, to guarantee a robust, consistent, and autonomous estimation of the ensemble clocks, a consistency check is described. It outputs a so-called consistency matrix which describes the active and non-active clocks. Since the identified active clocks can change from measurement to measurement, the corresponding Kalman filter (KF) parameters are adapted in a consistent way. Finally, the non-active clocks are estimated based on the KF output. The performance of the OCC using an ensemble of five DLR laboratory clocks, measured over a period of one year, is outlined. The clock ensemble consists of three high-performance Cesium-clocks (HP5071A), an active H-Maser (CH1-75) and a GPS disciplined Rb clock. Although miscellaneous anomalies like phase steps, outliers and clock exclusions arise, the OCC autonomously processes the five ensemble clocks and establishes a robust system time. Analysis results of this ensemble with different types of clocks when applying the OCC are presented.*

## SYSTEM TIME CONCEPTS FOR GNSS

Besides orbits and other system parameters a Global Navigation Satellite System (GNSS) generates and provides satellite clock offsets to the users. The clock or time offsets are with respect to (w.r.t.) the GNSS system time (ST). It is an integral part of the GNSS and is a key element of the GNSS performance

There can be extracted three requirements on the system time:

1. Stability of ST: no impact on satellite clocks for any  $\tau$  value
2. Robustness of ST: stability is guaranteed at any time  $t$
3. Metrology of ST: representation of UTC and long term performance

Regarding the ST implementation which shall provide the listed requirements, there can be distinguished two concepts.

The first ST concept is based on a *master clock*. The system time is established by a highly stable atomic clock, e.g. an active Hydrogen maser. Its short-term stability of about  $2e-13@1s$  generally fulfills the first requirement. However, to meet the second requirement “robustness”, the master concept has to deal with master clock failures like outage, time or frequency steps or outliers. A steered backup master clock can be installed to solve these issues. In case of a detected master clock failure the system time is established by the backup clock. The challenge is to provide such additional hardware and technology to steer the backup clock. Similarly, the third requirement is full-filled by steering the master clock w.r.t. UTC.

The second ST concept is based on *ensemble time*. The system time has got no physical representation and is computed by a timescale algorithm ([0]) which computes the time offsets of the ensemble clocks to the system time. The system time is basically understandable as a weighted average out of the ensemble clocks. The stability can be assumed to be better than the best ensemble clock. Regarding the second requirement “robustness”, the system time accepts loss of single clocks which provides a high reliability. Similar to the master concept, in order to meet the metrology requirement the ensemble clocks are steered to UTC.

## ENSEMBLE TIME: COMPOSITE CLOCK (CC)

The paper focuses on the timescale algorithm composite clock ([1], [2], [3]). It is a Kalman filter (KF) which models each ensemble clock by three states (APPENDIX A and B).

The Kalman filter is a recursive method which estimates the ensemble at time point  $t_k$  using the previous ensemble estimate and the measurement of time point  $t_k$  with  $\tau := t_k - t_{k-1}$

Assuming the ensemble consists out of  $N$  clocks, the inputs of the  $k$ -th Kalman filter iteration are

- $Z(t_k) \in R^{N-1}$  measurement w.r.t. measurement reference clock (MRC)
- $\hat{X}(t_{k-1}) \in R^{3N}$  previous ensemble estimate
- $C(t_{k-1}) \in R^{3N \times 3N}$  previous KF covariance

Every KF-iteration can be separated into three steps. The first step is the prediction of the ensemble  $\hat{X}^-(t_k) = \Phi \hat{X}(t_{k-1})$ . Next, the measurement residual w.r.t. MRC is calculated:

$$\tilde{Z}(t_k) = Z(t_k) - H \Phi \hat{X}(t_{k-1})$$

with  $H = H_{\#MRC} P$  (APPENDIX B). From KF-theory it is known that  $\tilde{Z}(t_k)$  is a White and Gaussian process with zero mean ([13]). The conditional mean of the ensemble is calculated by

$$\hat{X}(t_k) = \Phi \hat{X}(t_{k-1}) + K(t_k) \tilde{Z}(t_k)$$

The corresponding Kalman gain is

$$K(t_k) = C^-(t_{k-1}) H^T (H C^-(t_{k-1}) H^T + R)^{-1}$$

with  $C^-(t_{k-1}) = \Phi C(t_{k-1}) \Phi^T + Q(\tau)$ .

Notice, the notation  $\hat{X}(t_k) = (\hat{X}^{\#1}(t_k), \dots, \hat{X}^{\#N}(t_k))^T$  is used.  $\hat{X}^{\#i}(t_k) \in R^3$  is the estimate of clock  $\#i$ . Besides the ensemble estimate  $\hat{X}(t_k)$  the iteration outputs the KF covariance

$$C(t_k) = C^-(t_{k-1}) - K(t_k) H C^-(t_{k-1})$$

In detail, K. R. Brown developed several fundamental properties of the composite clock ([3]). A fundamental result is to understand the ensemble estimate w.r.t. to an implicitly defined system time  $X^{ST}(t_k) \in R^3$

$$\hat{X}(t_k) = X(t_k) - \bar{H}X^{ST}(t_k) + N_{rep}(t_k) \quad (1)$$

with  $\bar{H} := (I_3 \cdots I_3)^T \in \mathbb{R}^{3N \times 3}$ .  $N_{rep}(t_k) \in \mathbb{R}^{3N}$  is called representation error (to the implicit system time). The covariance of the representation error  $C_{rep}(t_k) := Cov(N_{rep}(t_k))$  is

$$C_{rep}(t_k) = C(t_k) - \bar{H}(\bar{H}^T C^{-1}(t_k) \bar{H})^{-1} \bar{H}^T$$

([3]). A proof given by Brown shows that the KF estimates  $\hat{X}(t_k)$  are unaffected using either  $C_{rep}(t_k)$  or  $C(t_k)$  (transparent variation). The advantage of  $C_{rep}(t_k)$  compared to  $C(t_k)$  is that its matrix entries converge which corresponds to the implicit steady-state of the KF composite clock. However, the regular KF covariance  $C(t_k)$  is not converging.

## OPERATIONAL COMPOSITE CLOCK (OCC)

Although the Kalman filter composite clock is mathematically specified, its application in a real-world system results in several additional challenges on the CC. The stability of atomic clocks which is modeled by the q-values (APPENDIX A), is not guaranteed for any time point. Clocks can be corrupted by different types of anomalies: time, frequency or drift steps. Furthermore, the measurements can be disturbed by outliers. Neither of these anomalies is accurately modeled by the CC itself, thus, corrupt the ensemble estimate.

The operational composite clock (OCC) is the extended version of the CC, which deals with operational issues of its real-world application.

### OCC MODULE: INITIALIZATION

At the moment of the first available measurement  $Z(t_1)$  no previous ensemble estimate  $\hat{X}(t_0)$  and covariance  $C(t_0)$  is available.

#### OPTION I: NO STATISTIC INFORMATION

KF theory ([4], [5], [6]) recommends to set

$$\hat{X}(t_0) := E(X(t_0)) \text{ and } C(t_0) := Cov(X(t_0))$$

It is a fundamental property of clock processes, that the mean and covariance of  $X(t_k)$  is unknown for any time point  $t_k$ . An option is to assume no statistical information about  $X(t_0)$  and set  $\hat{X}(t_0) := 0$  and to scale the corresponding clock covariance with a factor  $l := (l_1 \ l_2 \ l_3)$ :

$$q_i(\tau) := \begin{pmatrix} l_1 q_1 \tau + l_2 q_2 \frac{1}{3} \tau^3 + l_3 q_3 \frac{1}{20} \tau^5 & l_2 q_2 \frac{1}{2} \tau^2 + l_3 q_3 \frac{1}{8} \tau^4 & l_3 q_3 \frac{1}{6} \tau^3 \\ * & l_2 q_2 \tau + l_3 q_3 \frac{1}{3} \tau^3 & l_3 q_3 \frac{1}{2} \tau^2 \\ * & * & l_3 q_3 \tau \end{pmatrix}$$

Plugging the  $q_i(\tau)$  of the clocks together, the according ensemble process covariance is  $Q_i(\tau)$  and  $C(t_0) := Q_i(\tau)$ . The initialization depends on the choice of  $l$  and is called option I.

## OPTION II: PUT FIRST MEASUREMENT RESIDUAL TO ZERO

Using the properties of the measurement residual w.r.t. MRC

$$\tilde{Z}(t_1) = Z(t_1) - H\Phi\hat{X}(t_0)$$

a further initialization method can be derived. In an optimal designed KF, the measurement residual process shall be zero mean ([13]), thus, a reasonable choice is to put  $\hat{X}(t_0) := \mu$  with

$$0 = Z(t_1) - H\Phi\mu \quad (2)$$

The equation (2) is affine linear and the rank of  $H\Phi$  is

$$\text{rank}(H\Phi) = N - 1$$

(without proof). The dimensional freedom of the solution is

$$\dim(\ker(H\Phi)) = 3N - \text{rank}(H\Phi) = 2N + 1$$

An ad-hoc solution of equation (2) is to put clock #i with  $i \neq \text{MRC}$

$$\hat{X}^{\#i}(t_0) := \mu^{\#i} := (Z_i(t_0) + a \quad 0 \quad 0)^T \text{ and } \hat{X}^{\#\text{MRC}}(t_0) := \mu^{\#\text{MRC}} := (a \quad 0 \quad 0)^T$$

with steer parameter “a”. Since the frequency and drift states are set to zero and the measurement residual is zero, it holds

$$\hat{X}(t_1) = \Phi\hat{X}(t_0) + K(t_1)\tilde{Z}(t_1) = \Phi\hat{X}(t_0) = \hat{X}(t_0)$$

for any starting covariance  $C(t_0)$ .

It remains a suitable choice of  $C(t_0)$ . Here, the authors are not sure. The applied option is to calculate offline the steady state covariance

$$C_{rep}(t_\infty) := \lim_{k \rightarrow \infty} C_{rep}(t_k)$$

by successive iteration and put

$$C(t_0) := mC_{rep}(t_\infty)$$

The m parameter is used to scale the initial covariance.

## OPTION III: PUT FIRST AND SECOND MEASUREMENT RESIDUALS TO ZERO

In option II, the initialization method puts the frequency states to zero. The method could run into trouble, if the ensemble includes clocks with frequency offset. Typically, RAFS and SPHM have got a deterministic drift which leads to frequency offsets to the size of 1e-12 or even more.

In order to properly initialize an ensemble including clocks with deterministic drift, option I is extended to use two measurement residuals. Set  $\hat{X}(t_0) := \mu$  with

$$\begin{pmatrix} 0 \\ 0 \end{pmatrix} = \begin{pmatrix} Z(t_1) \\ Z(t_2) \end{pmatrix} - \begin{pmatrix} H\Phi \\ H\Phi\Phi \end{pmatrix} \mu \quad (4)$$

The equation (4) is again affine linear and the rank is

$$\text{rank} \begin{pmatrix} H\Phi \\ H\Phi\Phi \end{pmatrix} = 2(N-1)$$

(without proof).

As a result the dimensional freedom of the solution is

$$\dim(\ker \begin{pmatrix} H\Phi \\ H\Phi\Phi \end{pmatrix}) = 3N - 2(N-1) = N-1+3$$

The authors recommend to uniquely solve the equation (4) by fixing the drift states of all clocks to zero and fix one clock without frequency offset, e.g.  $\mu^{\#MRC} := (0 \ 0 \ 0)^T$ , to zero. The solution is called  $\mu \in R^{3N}$ . Again, a control parameter  $a$  can be used to steer the time offset of the implicit system time. Setting  $b^{\#i} := (a \ 0 \ 0)^T$  for every  $i$ , it holds

$$b = (b^{\#1}, \dots, b^{\#N}) \in \ker \begin{pmatrix} H\Phi \\ H\Phi\Phi \end{pmatrix}$$

and  $\mu + b$  solves the equation (4). The first and second ensemble estimates are

$$\hat{X}(t_1) = \Phi(\mu_u + b) \text{ and } \hat{X}(t_2) = \Phi\Phi(\mu_u + b)$$

In particular, it is  $\hat{X}_1^{\#MRC}(t_1) = \hat{X}_1^{\#MRC}(t_2) = a$ . Assuming the fundamental theorem of Brown, the arguments of option III holds and the implicit system time is steered in the same manner as presented in the example of option II. However, the steering quality depends on the representation error. Analogous to option II, the initial covariance is set to

$$C(t_0) := mC_{rep}(t_\infty)$$

#### EXAMPLE: INITIALIZING THE DLR CLOCK ENSEMBLE

The initialization options are compared using the ensemble of five atomic clocks operated at the DLR timing laboratory. The clock ensemble includes two high-performance HP Cesium clocks (clock/cesium #1 and #3), one standard HP Cesium clock (clock/cesium #2), a GPS disciplined Rubidium clock (clock #4) and an active Hydrogen maser (clock #5/AHM) of KVARZ. The ensemble clocks are measured w.r.t. to clock #5 using a time interval counter.

The outlined options I, II, III are investigated with  $m=2$  (option II and III),  $l=(1e20, 1e10, 1e10)$  (option I) and  $a=0$  (option I/II/III) to initialize the ensemble.

Figure 2 and 3 show the 2<sup>nd</sup> state estimates of the Cesium #1 and the AHM for all options. In figure 1, the 2<sup>nd</sup> state estimates are biased around  $1e-13$  for option I and III. The option III is shifted about  $0.5e-13$ .

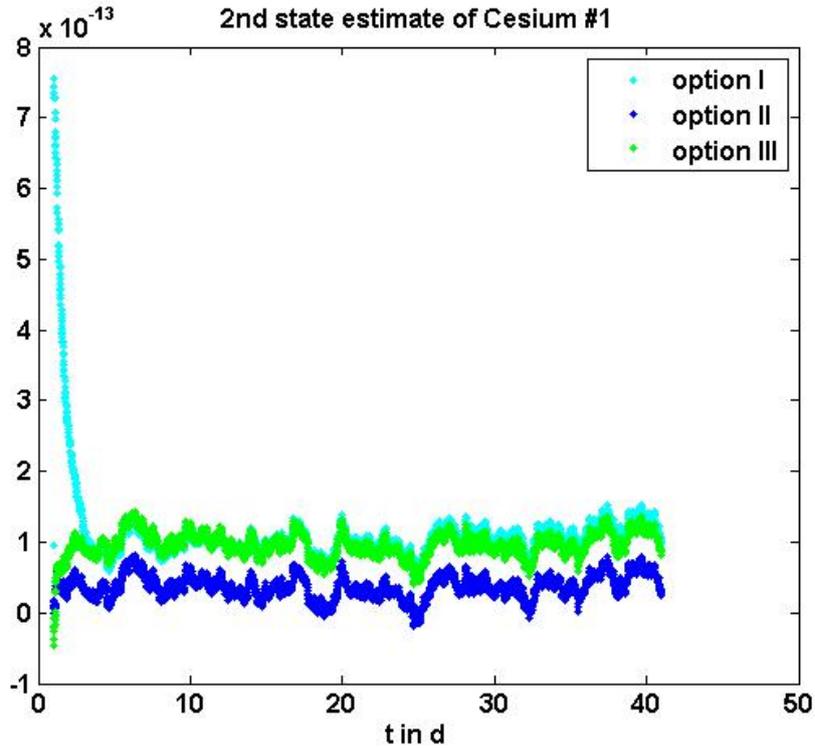


Figure 1: 2<sup>nd</sup>-state estimate of Cesium #1

Similar, the 2<sup>nd</sup> state estimates of the AHM are biased between 6e-14 and 10e-14 in case of option I and III. The bias of option II is around 1e-14.

Assuming that the clocks are free of a frequency offset, option II consistently estimates the clocks. It is the most promising initialization method in this situation.

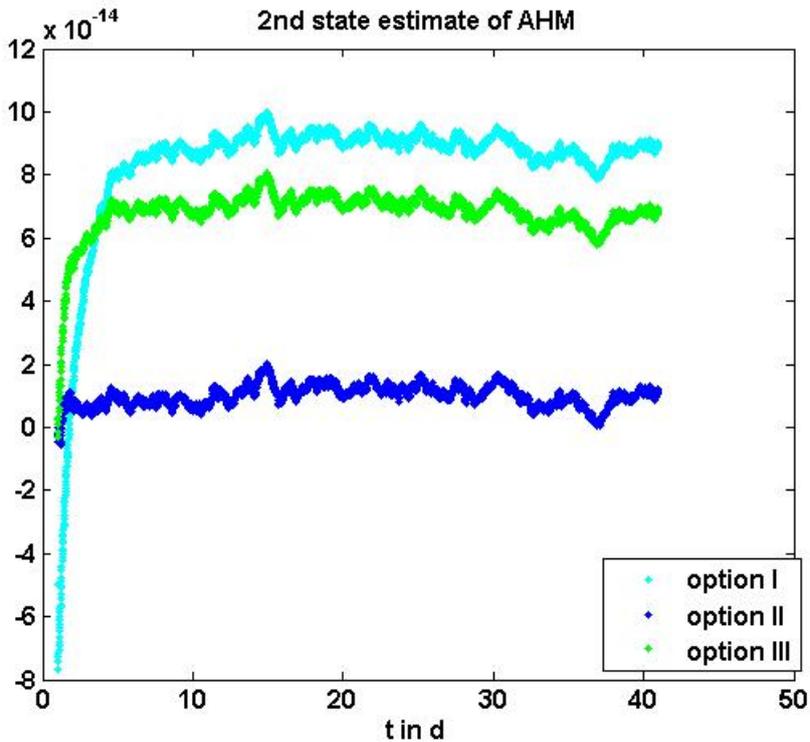


Figure 2: 2<sup>nd</sup>-state estimate of AHM

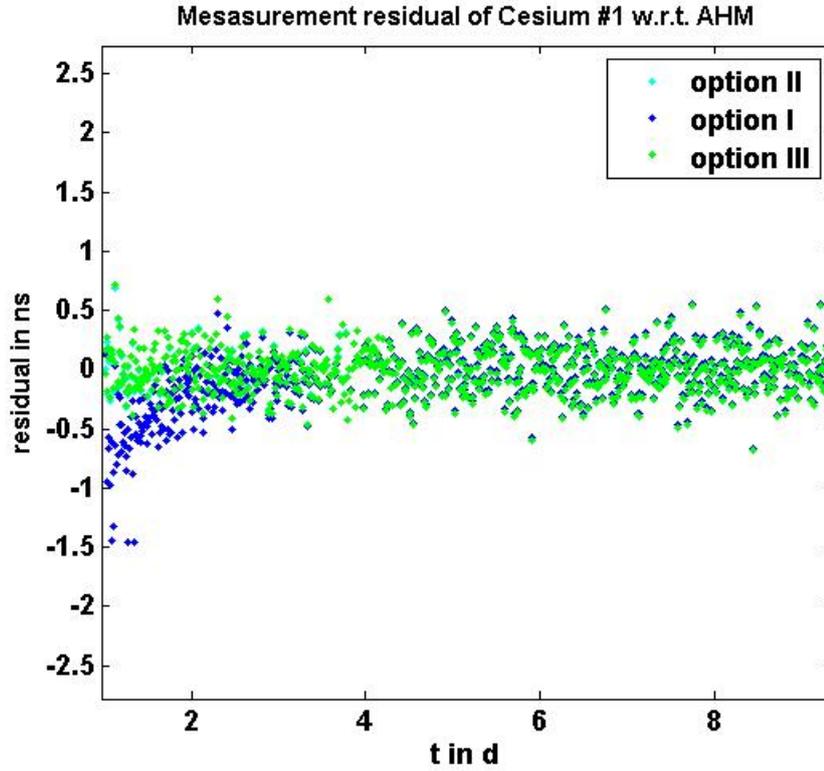


Figure 3: measurement residual of Cesium #1 w.r.t. AHM

Figure 3 shows the corresponding measurement residuals of Cesium #1 w.r.t. to AHM. By visual check, the residuals of option I are biased till the day two. The residuals of option II and III are almost identical and unbiased from the beginning.

## OCC MODULE: IDENTIFICATION OF NON AND ACTIVE CLOCKS

The  $k$ -th iteration processes the measurement  $Z(t_k)$  to compute the actual ensemble estimate based on the former estimate  $\hat{X}(t_{k-1})$ .  $Z(t_k)$  can be corrupted by outlier, time step, non-available measurement or frequency steps. None of these anomalies is modelled by the Kalman filter, thus, a regular processing of a corrupted measurement likely disturbs the ensemble estimate. It is the fundamental task of the consistency check to detect such kinds of anomalies in order to provide the robustness requirement of the OCC.

### CONSISTENCY CHECK OF MEASUREMENTS

The statistics of the measurement residual w.r.t. MRC

$$\tilde{Z}(t_k) = Z(t_k) - H\Phi\hat{X}(t_{k-1})$$

is applied to do a consistency check of the residual ([1]). The covariance of  $\tilde{Z}(t_k)$  is

$$HC^-(t_k)H^T + R = HC_{rep}^-(t_k)H^T + R$$

A hypothesis test of each component of  $\tilde{Z}(t_k)$  is performed ([1]). Clock # $i$  is called *active* w.r.t. MRC, if

$$|\tilde{Z}_i(t_k)| < 4\sqrt{(HC_{rep}^-(t_k)H^T + R)_{i,i}}$$

Contrary, it is called *non-active* w.r.t. MRC.

It remains to test the measurement reference clock. The authors employ an ad-hoc method. In case of less than two active clocks w.r.t. MRC, the measurement reference clock is called non-active and active, vice-versa. By definition, a clock whose measurement is not available is called non-active, too.

## CONSISTENCY CHECK OF RE-REFERENCED MEASUREMENTS

In case the measurement reference clock is identified as non-active, the measurement residual is not  $\tilde{Z}(t_k)$  processed and an alternate reference clock is determined.

The measurements are re-referenced to a so-called trial reference clock #l:

$$\begin{aligned} Z_i^{\#l}(t_k) &:= Z_i(t_k) - Z_l(t_k) = X_1^{\#i}(t_k) - X_1^{\#MRC}(t_k) + V_i(t_k) - (X_1^{\#l}(t_k) - X_1^{\#MRC}(t_k) + V_l(t_k)) \\ &= X_1^{\#i}(t_k) - X_1^{\#l}(t_k) + V_i(t_k) - V_l(t_k) \end{aligned}$$

$$Z_{MRC}^{\#l}(t_k) := -Z_l(t_k) = X_1^{\#MRC}(t_k) - X_1^{\#l}(t_k) - V_l(t_k)$$

By adapting the measurement matrix to  $H^{\#l} := H_l P$  (APPENDIX B), a hypothesis test of the measurement residual w.r.t. to trial reference clock #l

$$\tilde{Z}^{\#l}(t_k) := Z^{\#l}(t_k) - H^{\#l} \Phi \hat{X}(t_{k-1})$$

is performed:

$$|\tilde{Z}^{\#l}(t_k)|_{i,i} < 4 \sqrt{(H^{\#l} C_{rep}^-(t_k) (H^{\#l})^T + 2R)_{i,i}}$$

The same method to separate non-active and active clocks is executed as in the case of the measurement reference clock.

Performing a consistency check w.r.t. to every ensemble clock a so-called *consistency matrix* is computed. The i-th row indicates the applied trial reference clock #i and the j-th column indicates the measurement residual of clock #j. The matrix entry with index (i,j) is set to one, if the consistency check of clock #i w.r.t. to trial reference #j is consistent, and zero otherwise.

## OCC MODULE: KALMAN FILTER ADAPTATION

The consistency matrix is used to determine the so called Kalman filter reference clock (KRC). In case the entry of the measurement reference clock is one, it is used as KRC. Otherwise, a clock with diagonal entry “one” is selected as KRC. The corresponding row vector determines the active clocks (having one entries). The measurement and measurement matrix are adapted in a way that the non-active clocks are excluded. Furthermore, the measurement matrix is adapted w.r.t. KRC. In case no valid KRC can be identified, the ensemble estimate and covariance are predicted.

Since the number of active clocks M can be less than N, the former ensemble estimate  $\hat{X}(t_{k-1})$  and KF covariance  $C_{rep}(t_{k-1})$  which are of dimension 3N and (3N,3N) are adapted.

The non-active clocks are excluded from the former estimate  $\hat{X}(t_{k-1})$  to define  $\hat{M}(t_{k-1}) \in R^{3M}$ .

The covariance adaptation distinguishes two cases. In the first case, the number of active clocks at  $t_k$  compared to  $t_{k-1}$  decreases. The row and columns of the non-active clocks are excluded from the former covariance  $C_{rep}(t_{k-1})$  to define  $P(t_{k-1}) \in R^{3M \times 3M}$ .

In the second case, the number of active clocks increases.  $C_{rep}(t_{k-1})$  is reset to the steady of all clocks (offline computation). Afterwards, the rows and columns of the non-active clocks are excluded to define  $P(t_{k-1}) \in R^{3M \times 3M}$ . The authors observe by simulation that if the number of active clocks increases the covariance does not reach the steady-state reusing the previous  $C_{rep}(t_{k-1})$ . That is the reason to reset  $C_{rep}(t_{k-1})$  to the steady-state of all clocks and exclude the non-active clocks. The reduced covariance converges.

The actual estimate  $\hat{M}(t_k)$  and covariance  $P(t_k)$ , using transparent variation, is computed based on  $\hat{M}(t_{k-1})$  and  $P(t_{k-1})$ .

It remains to set  $C_{rep}(t_k) \in R^{3N \times 3N}$ . Consequently, the rows and columns of the active clocks of  $C_{rep}(t_k)$  are set to the corresponding ones of  $P(t_k)$ . The non-active clocks are set to the corresponding ones of  $C_{rep}(t_{k-1})$ .

Notice, the entries  $C_{rep}(t_k)$  of the non-active clocks are modified, if the number of active clocks increases. In this situation, the number of active decreases and some entries are unmodified.

## OCC MODULE: NON-ACTIVE CLOCK CALCULATION

It remains a procedure to calculate the non-active clocks w.r.t. to the implicit system time. The procedure depends on the reason of on non-activeness.

### NO MEASUREMENT AVAILABLE

In case of a non-available measurement the non-active clock  $\#i$  is predicted  $\hat{X}^{\#i}(t_k) := \phi \hat{X}^{\#i}(t_{k-1})$

### CONSISTENCY FAILURE

In case the clock is non-active due to violating the consistency check, the procedure depends on the consistency of iteration  $t_{k-1}$ . If the clock is previously active, the non-active clock  $\#i$  is predicted:  $\hat{X}^{\#i}(t_k) := \phi \hat{X}^{\#i}(t_{k-1})$ . It is assumed that the consistency check fails because of an outlier. If it was previously non-active the time offset w.r.t. the implicit system time is calculated using  $\hat{X}_1^{\#KRC}(t_k)$  and  $Z_i^{\#KRC}(t_k)$ :

$$\begin{aligned} Z_i^{\#KRC}(t_k) + \hat{X}_1^{\#KRC}(t_k) &= X_1^{\#i}(t_k) - X_1^{\#KRC}(t_k) + V_i(t_k) + (X_1^{\#KRC}(t_k) - X_1^{ST}(t_k) + N_1^{\#KRC}(t_k)) \\ &= X_1^{\#i}(t_k) - X_1^{ST}(t_k) + V_i(t_k) + N_1^{\#KRC}(t_k) =: \hat{X}_1^{\#i}(t_k) \end{aligned}$$

The second and third states of clock  $\#i$  are predicted:

$$\hat{X}_2^{\#i}(t_k) := \hat{X}_2^{\#i}(t_{k-1}) + \tau \hat{X}_3^{\#i}(t_{k-1}) \text{ and } \hat{X}_3^{\#i}(t_k) := \hat{X}_3^{\#i}(t_{k-1})$$

## OVERVIEW OF OPERATIONAL COMPOSITE CLOCK (OCC)

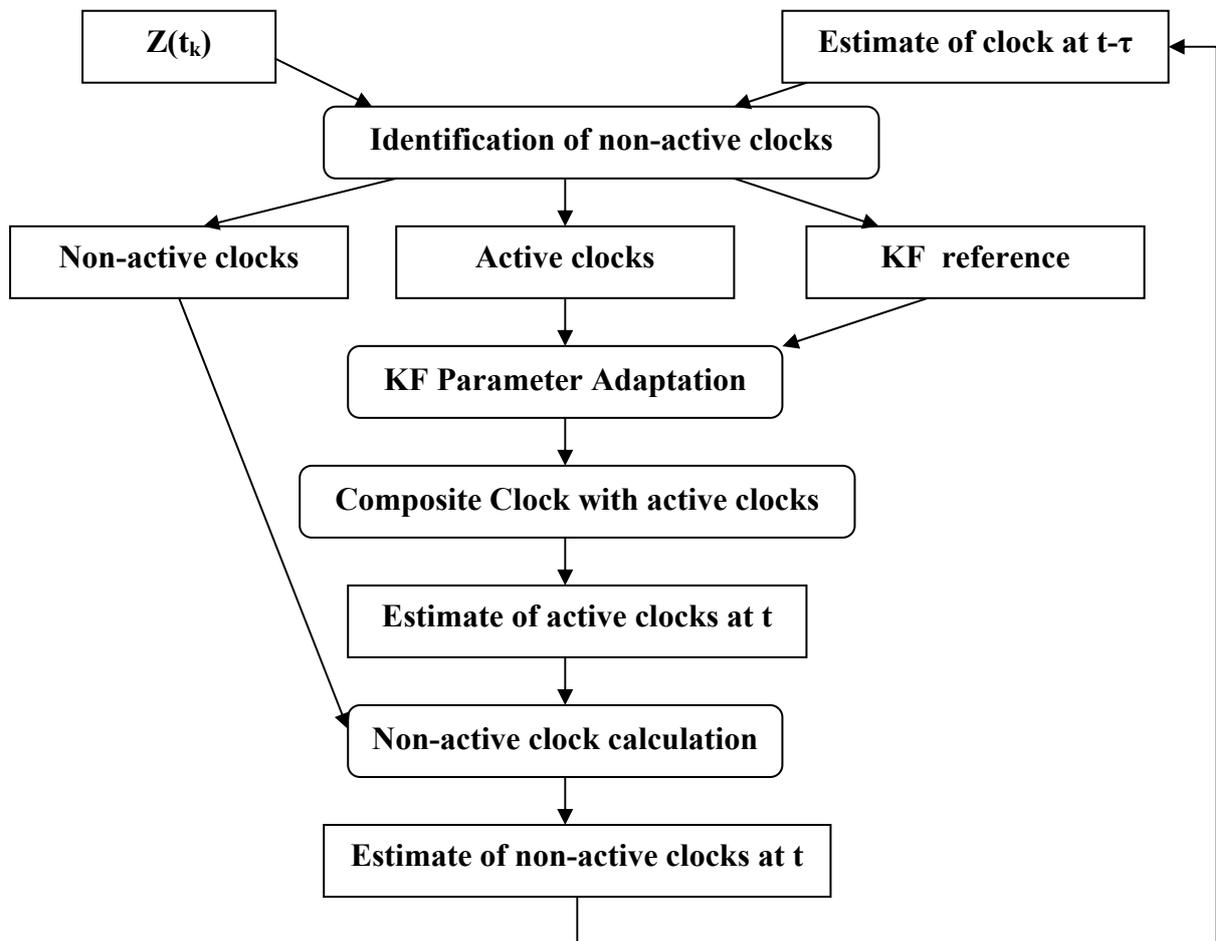


Figure 4: Workflow of Operational Composite Clock

### ROBUSTNESS AND STABILITY OF DLR'S OCC

The DLR clock ensemble of 5 atomic clocks (example: initialization) is processed using the OCC.

### HANDLING OF OUTLIERS AND TIME STEP

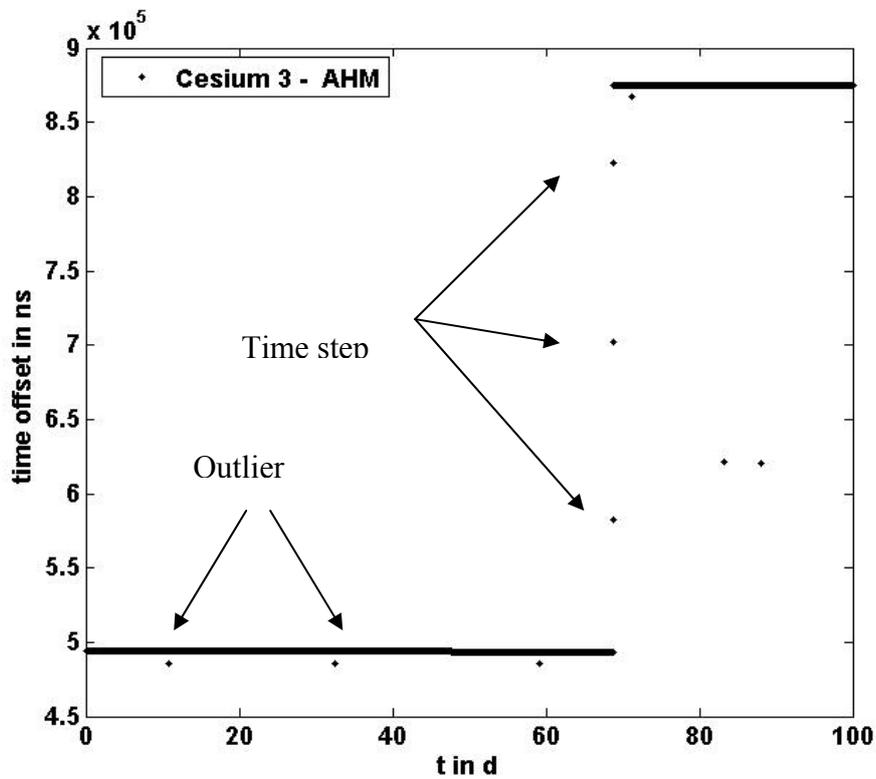


Figure 5: measurement of Cesium 3 w.r.t. AHM

Figure 5 shows the measurement of the Cesium #3 w.r.t. AHM. It is corrupted by several outliers and a time step occurs at  $t=68.74d$ . Focusing on the measurement residual of Cesium #3 w.r.t. AHM (figure 6), the outliers and the time step can be visually identified and are detected by the OCC consistency check module.

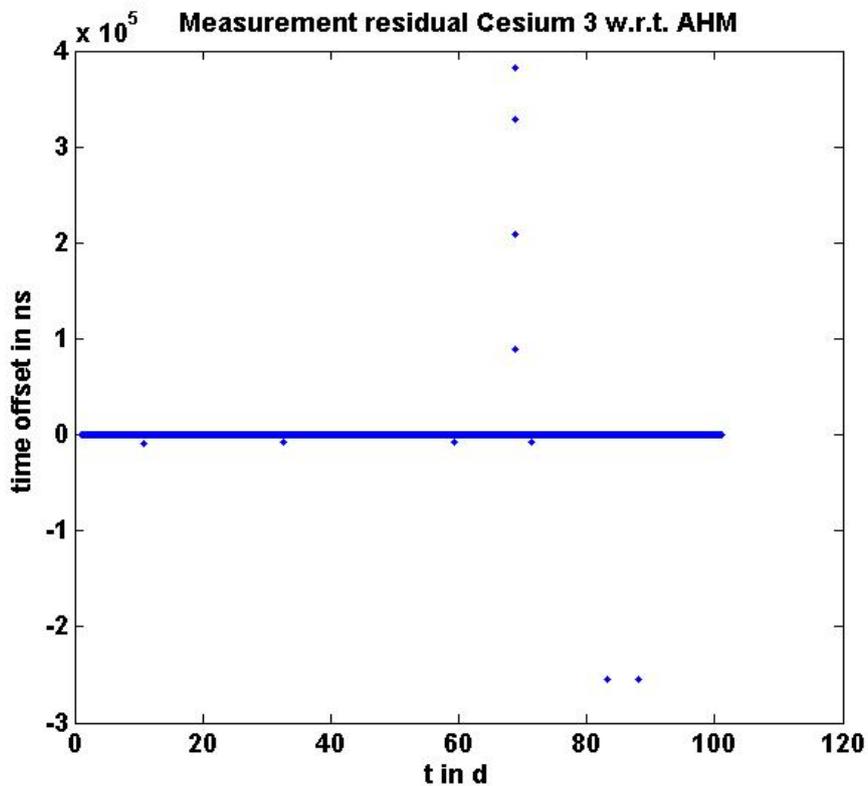


Figure 6: measurement residual of Cesium #3 w.r.t. AHM

In case of the outliers the estimate of the Cesium #3 corresponds to its prediction (figure 7). However, to deal with the time step at  $t=68.74d$  several steps are executed by the OCC. As outlined, the consistency matrix is used to choose a valid KF reference clock. At  $t=68.74d$ , no valid KRC can be identified, thus, the ensemble is predicted. The same enters the following two iterations. Analyzing the forth iteration after  $t=68.74d$ , the diagonal entry of the AHM is still zero and set to non-active. The remaining diagonal entries are one and can be used as KF reference clock. The time step of the AHM is finally present in every clock measurement, thus, it is dropped out by the re-referencement method. It remains in the AHM measurement residual w.r.t. to the trial reference clock and, thus, the AHM is set to non-active w.r.t. trial reference clock.

The OCC module KF parameter adaptation excludes the AHM and set the KF reference. The remaining active clocks are estimated. Figure 4 shows the estimate of Cesium #3 – it is not impacted by the time step.

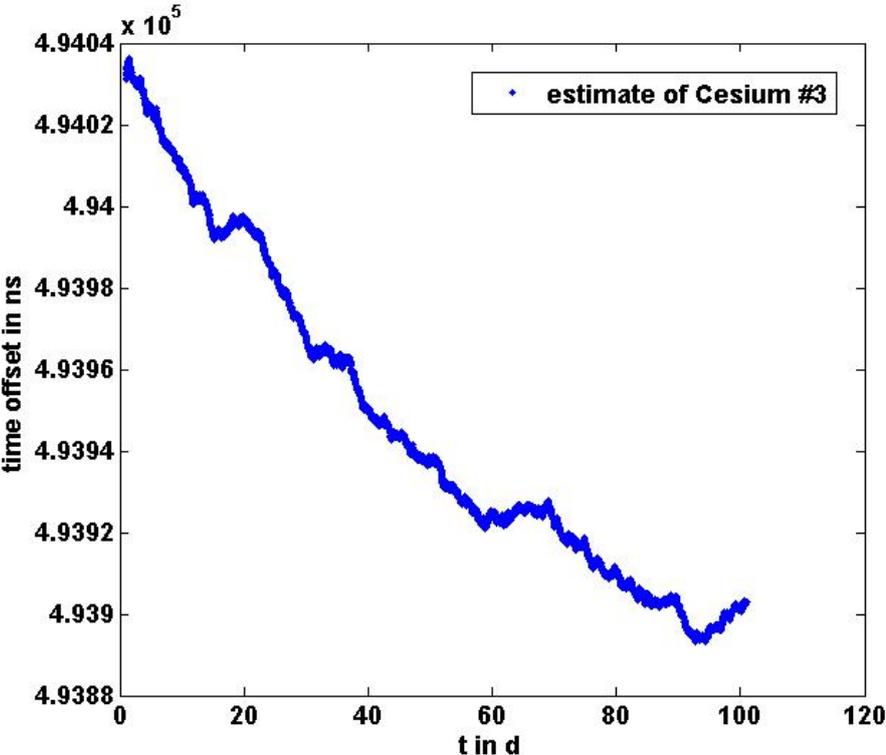


Figure 7: first state estimate of Cesium #3

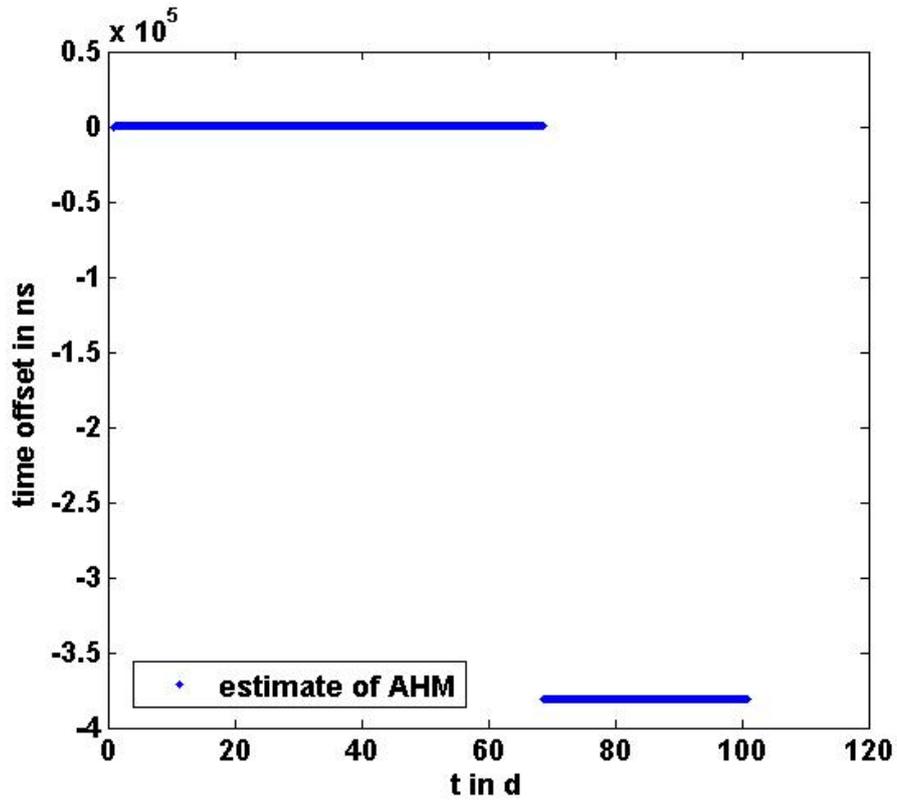


Figure 8: first state estimate of AHM

Contrarily, the estimate of AHM includes the time step of the AHM (figure 8).

### ALLAN DEVIATION OF TIME LAB CLOCKS

Both the KF estimates as well as the measurements are corrupted by anomalies, thus, the empirical Allan deviation of the data is impacted having no exclusion method. The dynamic Allan Deviation ([14]) can be used to handle this issue in another way. At each time point  $t_k$ , the Allan deviation is calculated using a fixed window of data. Data windows, free of anomalies, are used to calculate the Allan deviation of the clocks.

The time interval counter is specified with  $2 \cdot 10^{-11} \tau^{-1}$ . Figure 9 compares the stabilities of the Cesium #1 w.r.t. AHM or implicit system time. The stability of the Cesium #1 estimate and the measurement w.r.t. AHM are almost identical. This indicates that neither the AHM nor the implicit system time impact the stability of the Cesium #1. Its performance is extrapolated  $6 \cdot 10^{-12} \tau^{-0.5}$  and worse than its hardware specification of  $5 \cdot 10^{-12} \tau^{-0.5}$ .

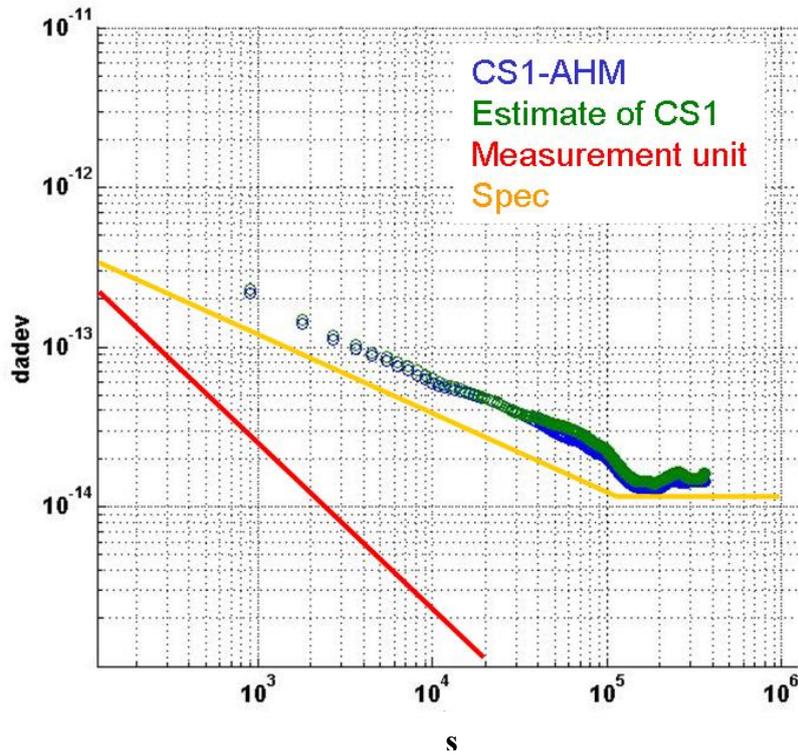


Figure 9: stabilities of high performance Cesium #1

Figure 10 shows the stability of the AHM estimate. Its stability is extrapolated  $1 \cdot 10^{-12} \tau^{-0.5}$  and worse than its specification of  $2 \cdot 10^{-13} \tau^{-0.5}$ . This is reasoned because the Cesium clocks are part of the implicit system time. The stability of the weighted Cesium clocks is worse than the stability of the AHM. As a result, the stability of the AHM estimate is characterized by the weighted Cesium clock stability.

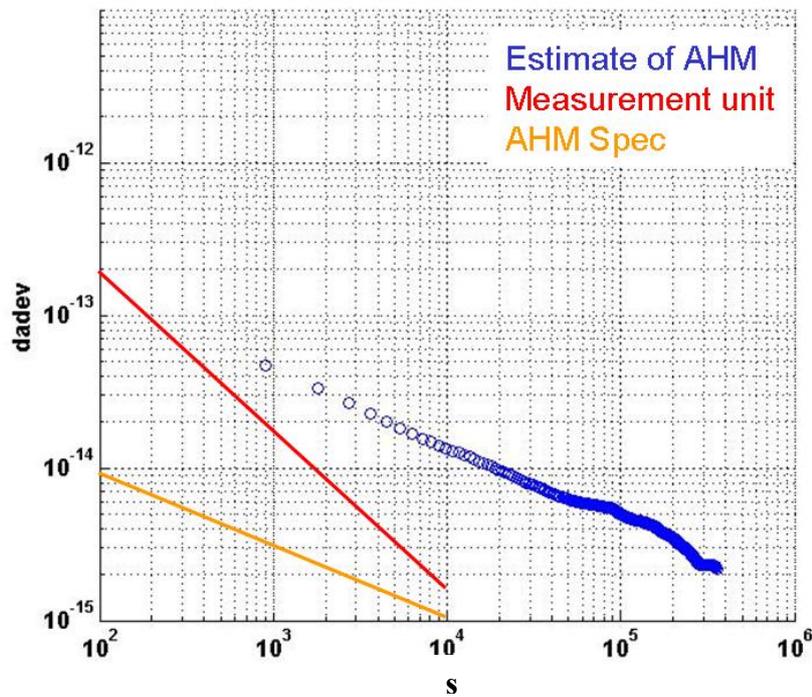


Figure 10: stability of AHM

## CONCLUSION

The paper describes required methods to operate the composite clock in a real-world environment (Time-lab, GNSS). The statistic properties of the measurement residual process which is a zero mean and Gaussian process (KF theory) are utilized to develop consistent initialization procedures. The recommended initialization procedure puts the ensemble state in a way to solve the measurement residual equation for either one or two measurement residuals. Testing the procedure with a DLR clock ensemble of five atomic clocks, the most promising results for that ensemble are achieved by fixing the frequency states as well as the drift states to zero. However, initializing a clock ensemble including clocks with frequency offsets it is recommended to solve the measurement residual equation using two measurement residuals. As a result, frequency estimates of the clock ensemble are provided.

Based on the measurement residual process a hypothesis test is described with splits the ensemble in active and non-active clocks. The hypothesis test works with any reference clock as long as it is part of the ensemble. The Kalman filter is executed with the active clocks to calculate estimates of them. The non-active clocks are calculated using an additional method. The robustness of the OCC is validated using measurements out of the DLR clock laboratory. Outliers along with time steps of the reference clock are detected and processed by the OCC without disturbing the remaining estimates.

## ACKNOWLEDGMENTS

The authors would like to say thank you to Demetrios Matsakis (USNO) for helpful and useful comments on the paper.

## APPENDIX

### A: CLOCK AND ENSEMBLE PROCESS

The process of clock #i is defined by ([3], [8], [15], [16]):

$$X^{\#i}(t_k) = \phi X^{\#i}(t_{k-1}) + W^{\#i}(t_k)$$

with  $\phi = \begin{pmatrix} 1 & \tau & 0.5\tau^2 \\ 0 & 1 & \tau \\ 0 & 0 & 1 \end{pmatrix}$ .  $W^{\#i}(t_k)$  is a White and zero mean Gaussian process with

$$Cov(W^{\#i}(t_k)) = Q^{\#i}(\tau) = \begin{pmatrix} q_1\tau + q_2\frac{1}{3}\tau^3 + q_3\frac{1}{20}\tau^5 & q_2\frac{1}{2}\tau^2 + q_3\frac{1}{8}\tau^4 & q_3\frac{1}{6}\tau^3 \\ * & q_2\tau + q_3\frac{1}{3}\tau^3 & q_3\frac{1}{2}\tau^2 \\ * & * & q_3\tau \end{pmatrix}. \text{ (} q_1, q_2, q_3\text{)-value is the so}$$

called q-value. Correspondingly, the ensemble and noise processes are defined by  $X(t_k) = (X^{\#1}(t_k), \dots, X^{\#N}(t_k))^T$  and  $W(t_k) = (W^{\#1}(t_k), \dots, W^{\#N}(t_k))^T$ .  $W^{\#1}(t_k), \dots, W^{\#N}(t_k)$  are stochastically independent and

$$Q(\tau) = Cov(W(t_k))$$

It is  $\Phi = I_N \otimes \phi$ .

## B: MEASUREMENT PROCESS

Define the matrix

$$P = \begin{pmatrix} 1 & 0 & 0 & \cdots & \cdots & \cdots & \cdots & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & \cdots & 0 \\ \vdots & \ddots & \ddots & \ddots & \ddots & \ddots & \ddots & \vdots \\ 0 & \cdots & \cdots & \cdots & \cdots & 1 & 0 & 0 \end{pmatrix} \in R^{Nx3N}$$

and

$$H_r = \begin{pmatrix} e_1 - e_r \\ e_2 - e_r \\ \vdots \\ e_{r-1} - e_r \\ e_{r+1} - e_r \\ \vdots \\ e_N - e_r \end{pmatrix} \in R^{N-1 \times N}$$

with  $e_i \in R^N$  i-th unit vector and measurement reference clock #r. The measurement process is defined by

$$Z(t_k) = H_r P X(t_k) + V(t_k)$$

with  $V(t_k) = (V_1(t_k) \cdots V_{N-1}(t_k))^T$  and  $Cov(V(t_k)) = R$ . The measurement matrix is defined by  $H = H_r P$ .

## REFERENCES

- [0] Tavella P. and Thomas C. “*Comparative Study of Time Scale Algorithms*”, Metrologia, 1991, 28
- [1] Jones R. and Tyron P. “*Estimating Time From Atomic Clocks*”, Journal of Research of the National Bureau of Standards, 1983, 88
- [2] Tyron P. and Jones R. “*Estimation of Parameters in Models for Cesium Beam Atomic Clocks*”, NBS Journal of Research, 1983
- [3] Brown K. R. “*The Theory of the GPS Composite Clock*”, Proceedings of the 4th International Technical Meeting of the Satellite Division of the Institute of Navigation ION, IBM, 1991
- [4] Jazwinski A. H. “*Stochastic Processes and Filtering Theory*”, Dover Publications, 2007
- [5] Maybeck P. S. “*Stochastic Models, Estimation and Control*”, Academic Press, 1979
- [6] Grewal M. and Andrews, A. P. “*Kalman Filtering - Theory and Practice*”, Prentice Hall, 1993

- [7] Shumway R. H., Olsen D. E. & Levy L. J. "*Estimation and tests of hypotheses for the initial mean and covariance in the kalman filter model*", Communications in Statistics - Theory and Methods, 1981, 10
- [8] Hutsell S. T. "*Relating the Hadamard Variance To MCS Kalman Filter Clock Estimation*", PTTI Annual Precise Time and Time Interval, 1995, 29
- [9] Hutsell S. T. "*Fine Tuning GPS Clock Estimation in the MCS*", PTTI Annual Precise Time and Time Interval, 1994
- [10] Hutsell S. T. "*Recent MCS Improvements to GPS Timing*", ION GPS-94 Proceedings, 1994
- [11] Hutsell, S. T. "*Ideas For Future GPS Timing Improvements*", PTTI Annual Precise Time and Time Interval, 1995
- [12] Brown, K. R., Hutsell, S. and Shank, C. "*L-Band Anomaly Detection in GPS*", ION, 1995
- [13] Mehra R. K. "*On the Identification of Variances and Adaptive Kalman Filtering*", IEEE Transactions on automatic control, 1970, 15
- [14] Galleani L. and Tavella P. "*Detection and identification of atomic clock anomalies*", Metrologia, 2008, 45
- [15] Zucca C. and Tavella P. "*The clock model and its relationship with the Allan and related variances*" IEEE Transactions on Ultrasonics, Ferroelectris and Frequency Control, 2005, 52
- [16] Chaffee J. W. "*Relating the Allan Variance to the Diffusion Coefficients of a Linear Stochastic Differential Equation Model for Precision Oscillators*", IEEE Transactions on Ultrasonics, Ferroeletrics and Frequeny Control, 1987, UFFC-34