

STUDY OF LAMINAR-TO-TURBULENT TRANSITION OF SWEEP-WING BOUNDARY LAYER WITH TEMPERATURE-SENSITIVE PAINT

Marina Barahona¹, Marco Costantini², Alberto Felipe Rius-Vidales³, Christian Klein², and Marios Kotsonis¹

¹ Department of Flow Physics and Technology, Delft University of Technology (TU Delft), Delft, The Netherlands

² Institute of Aerodynamics and Flow Technology, German Aerospace Center (DLR), Göttingen, Germany

³ Department of Maritime and Transport Technology, Delft University of Technology (TU Delft), Delft, The Netherlands

Introduction

Understanding the laminar-to-turbulent transition driven by the Stationary Crossflow Instability (S-CFI) remains a key scientific challenge towards achieving Natural Laminar Flow (NLF). In recent years, experimental investigations of boundary-layer transition dominated by CFI have been pivotal in advancing this goal.

Wind tunnel experiments of CFI-driven laminar-to-turbulent transition typically employ highly swept wings featuring a strong favorable pressure gradient at the Leading Edge (LE) and mid-chord regions. In addition, for the particular study of the stationary CFI, the wind tunnel facility must operate at very low-turbulence intensity levels ($Tu < 0.15\%$, Bippes 1999). Such configuration has been widely used and is well-established for its ability to replicate in-cruise conditions. However, the curvature of the wing surface often complicates detailed boundary layer measurements, necessitating more complex Hot-Wire Anemometry (HWA) or Particle Image Velocimetry setups. Furthermore, stability analysis for experiments involving swept-wing configurations must account for surface curvature effects on instability growth, introducing more complexity (Haynes & Reed, 2000).

To address the aforementioned challenges, an alternative approach involves using a swept flat plate, where the favorable pressure gradient is imposed externally via a contoured top wall, denoted as displacement body (Bippes, 1999). This flat-plate configuration offers significant advantages for fundamental studies of S-CFI, as it simplifies both boundary layer measurements and stability calculations. Furthermore, it provides flexibility for investigating various pressure gradient configurations through modifications of the displacement body.

Building on years of research conducted on a swept-wing model (M3J) within TU Delft's Flow Control research group (e.g. Serpieri & Kotsonis 2016), a new swept flat-plate configuration was designed and manufactured: the Swept Transition Experimental Platform (STEP, Rius-Vidales *et al.* 2024). Investigations performed on the STEP setup primarily focus on the fundamental study of S-CFI laminar-to-turbulent transition under both active (e.g. wall-cooling) and passive (e.g. surface irregularities) flow control strategies. One notable application of this configuration involved investigating the impact of wall-heating on the growth and breakdown of S-CFI (Barahona *et al.*, 2024). For further details on the STEP geometry and flow measurement capabilities, the reader is referred to Rius-Vidales *et al.* (2024).

An inherent limitation of the STEP setup was the restricted optical access available for detecting laminar-to-turbulent transition using IR Thermography (IRT). The proximity of the top wall to the flat-plate surface, coupled with the

high cost of large IR-transparent windows, forced the IR camera to be positioned too close to the plate's surface. As a result, this configuration made it challenging to capture a comprehensive view of the transition front's spatial distribution, while at the same time ensuring a sufficient spatial resolution.

To overcome this limitation, a new swept flat-plate model was recently designed and manufactured in collaboration with the Pressure- and Temperature-Sensitive Paint Group of DLR. This new platform features a large surface area coated with Temperature-Sensitive Paint (TSP) for detecting laminar-to-turbulent transition (Liu *et al.*, 2005). Since TSP emits in the visible light spectrum, transition measurements can be performed using a high resolution scientific camera, eliminating the need for expensive IR-transparent materials and allowing for more extensive optical access. This new configuration is referred in what follows as the Thermal Swept Transition Experimental Platform (T-STEP).

The presented work comprises the first set of measurements using TSP for transition front detection in the new T-STEP setup. Leveraging the rapid data acquisition, simplified experimental setup, large coated surface area, and ample optical access, an extensive parametric study was conducted. The investigation systematically examined the effects of various Distributed Roughness Element (DRE) forcing conditions, including variations in S-CFI amplitude and wavelength, across multiple freestream velocities. These measurements provide a unique opportunity to build a comprehensive characterization of the experimental setup, enabling direct comparisons with predictions from stability theory.

Experimental setup

The experiments were conducted in the A-tunnel, a low-turbulence ($Tu \leq 0.06\%$) vertical wind tunnel at TU Delft. During the experiments, the freestream velocity (U_∞) was varied from 15 to 20 m/s, resulting in a chord-based Reynolds number¹ ranging from 8.59×10^5 to 1.14×10^6 .

The T-STEP setup includes a flat plate with a 45° sweep angle, a streamwise chord length (c_X) of 848 mm, and a span of 884 mm. The leading edge is shaped as a Modified Super Ellipse with an aspect ratio of 6. The TSP area, parallel to the LE, has dimensions of 840 mm \times 358.7 mm and starts at $X/c_X = 0.397$ (see magenta area in Fig. 1a). Additionally, the flat plate is designed with a 10 mm deep pocket on the backside of the model to accommodate active thermal devices, such as a cold plate, see Fig. 1a.

¹The chord-based Reynolds number is defined as $Re_{c_X} = U_\infty c_X / \nu_\infty$, where c_X is the chord length and ν_∞ is the kinematic viscosity.

To modify the pressure distribution over the flat plate, a contoured top wall is employed. This top wall consists of two sections: a solid section near the LE imposing the initial favorable pressure gradient (see green body in Fig. 1b) and a transparent polycarbonate section generating the final monotonic increase of velocity near the trailing edge. In addition, this transparent polycarbonate section allows for ample optical access to the TSP area. Surface pressure measurements are obtained using two rows of static pressure taps (99 taps in total), positioned 242 mm from the centerline on either side of the model, as shown in Fig. 1a.

An automated three-axis traversing system is located downstream of the flat plate to facilitate precise positioning of a hot-wire probe. For the current experiments, a DANTEC V-wire probe, consisting of two-wires placed at 90° (Fig. 1a), was used to measure two velocity components (u and w), following the works of Deyhle & Bippes (1996) and Barth & Hein (2022).

To control the amplitude and spanwise wavelength of the primary instability mode, DREs were employed. Using the same DRE thickness ($k_D = 25 \mu\text{m}$), three spanwise wavelengths ($\lambda_z = 7, 9$, and 11 mm) were tested at three streamwise locations ($x_D/c = 0.135, 0.1$, and 0.053).

The TSP layer consisted of a europium complex (luminophore) incorporated into a commercial polyurethane clear-coat binder (Ondrus *et al.*, 2015). The TSP was applied on a laminate designed in a manner similar to Costantini *et al.* (2021a) and embedded into the main body of the model. A current-carrying carbon fiber layer of 0.1 mm thickness was integrated in the laminate and served as electrical heating for the TSP measurements. The artificial heat flux imposed between the surface and the flow led to the enhancement of the temperature gradient between laminar and turbulent flow regions, enabling accurate detection of the laminar-to-turbulent transition. The laminate temperature was monitored during the measurements using four thermocouples placed under the TSP coating.

The TSP was excited by two LEDs (HARDsoft IL-107UV Illuminators, central excitation wavelength of 385 nm), and its emission was captured using a scientific sCMOS camera (2560×2160 pixels, 16-bit, $6.5 \mu\text{m}$ pixel pitch). The equipment is positioned approximately 1.5 m from the measurement surface, with the camera equipped with a 25 mm focal length lens to cover the full streamwise extent of the TSP region, resulting in a final spatial resolution of 1 mm/px. The LEDs are fitted with low-pass optical filters (550 nm cut-off), and the camera is equipped with a high-pass optical filter (570 nm cut-off). This enabled the separation of excitation and emission light. During each run, 100 TSP images were captured at a 10 Hz acquisition rate.

Preliminary results and discussion

Exemplary TSP results are shown in Figs. 2 and 3. In these figures, laminar and turbulent flow regions correspond to the dark and bright regions, respectively. The acquired TSP images were geometrically corrected (dewarped) using a structured grid of fiducials applied below the TSP layer. To identify the transition front, the maximum gradient of the intensity ratio in the streamwise (x) direction is determined, in a manner similar to Costantini *et al.* (2021b). Fig. 2 shows the computed maximum gradient and the linear fit to the identified transition front.

Fig. 3 shows the transition front advancement for increasing freestream velocity under a fixed DRE forcing condition. The wavelength of the forced S-CFI mode can be clearly iden-

tified ($\lambda_z = 7 \text{ mm}$) from their thermal signature in the TSP results, in a manner similar to Lemarechal *et al.* (2019). Additionally, Fig. 3 shows increased spanwise uniformity of the transition front with higher freestream velocities.

In the complete contribution, results under different DRE forcing and freestream conditions will be presented, together with HWA measurements using a V-wire probe configuration. The combination of two-component HWA measurements with TSP data produces a comprehensive experimental dataset, enabling precise detection of the transition front as well as detailed characterization of the steady and unsteady perturbation content of both the streamwise (u) and spanwise (w) velocity components.

The new T-STEP setup provides a robust experimental framework for advancing the understanding of laminar-to-turbulent transition dominated by S-CFI and exploring potential innovative strategies to delay laminar-to-turbulent transition. These experimental capabilities present opportunities for new collaborations, which can be further explored during the conference.

REFERENCES

- Barahona, M, van de Weijer, A F, Rius-Vidales, A F & Kotsonis, M 2024 Impact of a heated wall on the laminar-to-turbulent transition of crossflow vortices: an experimental study. In *AIAA Scitech 2024 Forum*, p. 0695.
- Barth, H P & Hein, S 2022 Experimental investigation of spanwise-equidistant spinning disks for control of crossflow-dominated laminar-turbulent transition. In *AIAA SciTech 2022 Forum*, p. 2540.
- Bippes, H 1999 Basic experiments on transition in three-dimensional boundary layers dominated by crossflow instability. *Progress in aerospace sciences* **35** (4), 363–412.
- Costantini, M, Henne, U, Klein, C & Miozzi, M 2021a Skin-friction-based identification of the critical lines in a transonic, high reynolds number flow via temperature-sensitive paint. *Sensors* **21** (15), 5106.
- Costantini, M, Henne, U, Risius, S & Klein, C 2021b A robust method for reliable transition detection in temperature-sensitive paint data. *Aerospace Science and Technology* **113**, 106702.
- Deyhle, H & Bippes, H 1996 Disturbance growth in an unstable three-dimensional boundary layer and its dependence on environmental conditions. *Journal of Fluid Mechanics* **316**, 73–113.
- Haynes, T S & Reed, H L 2000 Simulation of swept-wing vortices using nonlinear parabolized stability equations. *Journal of Fluid Mechanics* **405**, 325–349.
- Lemarechal, J, Costantini, M, Klein, C, Kloker, M J, Würz, W, Kurz, H B, Streit, T & Schaber, S 2019 Investigation of stationary-crossflow-instability induced transition with the temperature-sensitive paint method. *Experimental Thermal and Fluid Science* **109**, 109848.
- Liu, T, Sullivan, J P, Asai, K, Klein, C, Egami, Y *et al.* 2005 *Pressure and temperature sensitive paints*, vol. 1. Springer.
- Ondrus, V, Meier, R J, Klein, C, Henne, U, Schäferling, M & Beifuss, U 2015 Europium 1, 3-di (thienyl) propane-1, 3-diones with outstanding properties for temperature sensing. *Sensors and Actuators A: Physical* **233**, 434–441.
- Rius-Vidales, A F, Barahona, M & Kotsonis, M 2024 Swept transition experimental platform (step). In *AIAA Scitech 2024 Forum*, p. 0942.
- Serpiéri, J & Kotsonis, M 2016 Three-dimensional organisation of primary and secondary crossflow instability. *Journal of Fluid Mechanics* **799**, 200–245.

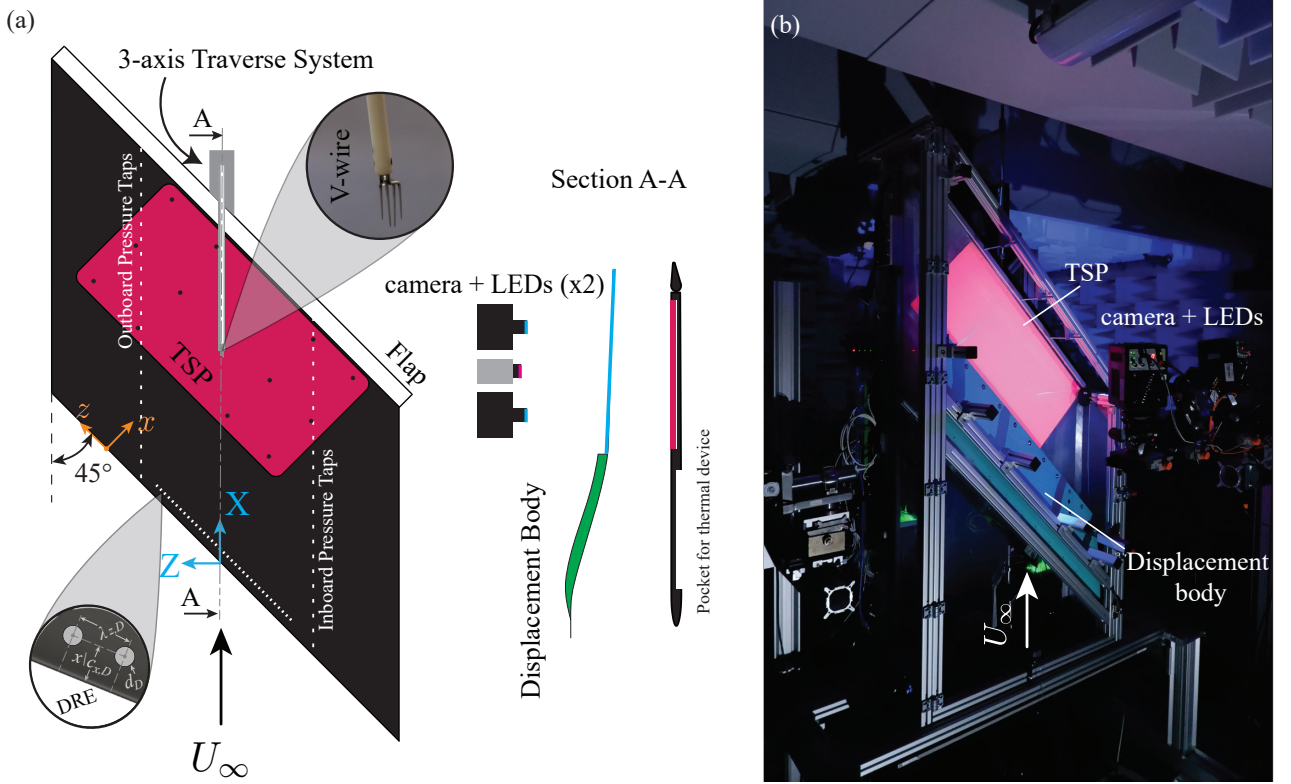


Figure 1. (a) General schematic of the T-STEP setup featuring the main components, namely the TSP region, pressure taps, DREs, 3-axis traverses, and V-wire probe. Section A-A corresponds to the cross-sectional view of the T-STEP setup showing the displacement body, together with LEDs, and camera used for TSP measurements. (b) Photograph of the T-STEP setup inside the A-tunnel with excited TSP (LEDs on, room light off).

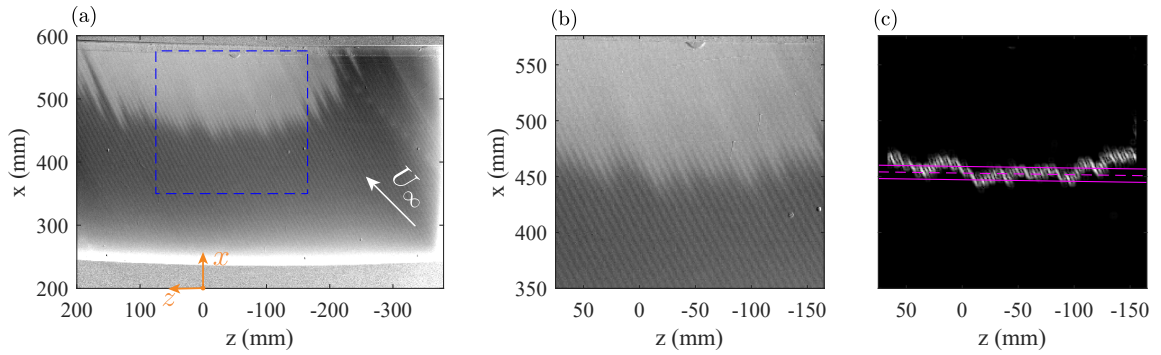


Figure 2. (a) TSP results dewarped and oriented to the (x,z) coordinate system shown in Fig. 1, where $z = 0$ corresponds to the mid-span of the TSP area. Bright regions correspond to turbulent flow, while darker regions correspond to laminar flow. (b) Region for transition front detection (bounded by dashed blue lines in a). (c) Maximum intensity gradient in X direction ($\partial I / \partial X$) with magenta line showing the linear fit to the transition front, dashed line for the mean, and solid lines for standard deviation.

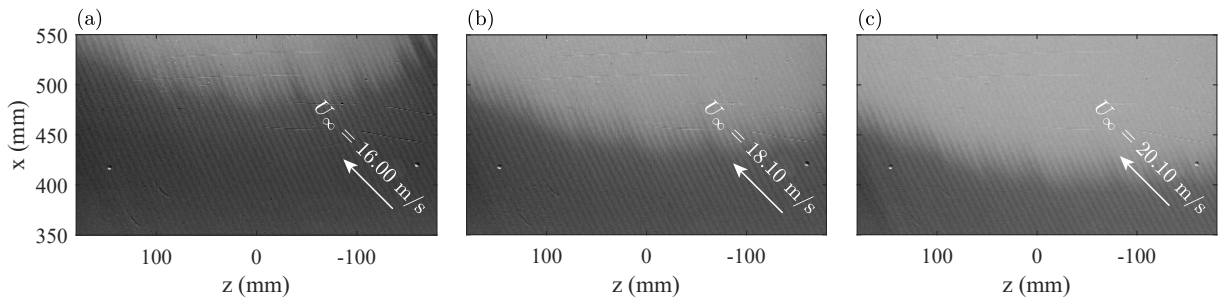


Figure 3. TSP results at fixed DRE conditions ($\lambda_z = 7$ mm, $k_D = 25$ μ m, and $x_D/c = 0.135$) under three different freestream velocities.